




Panic Hardware

Luter Fire Command Panic Exit Device Automatic Flush Bolts

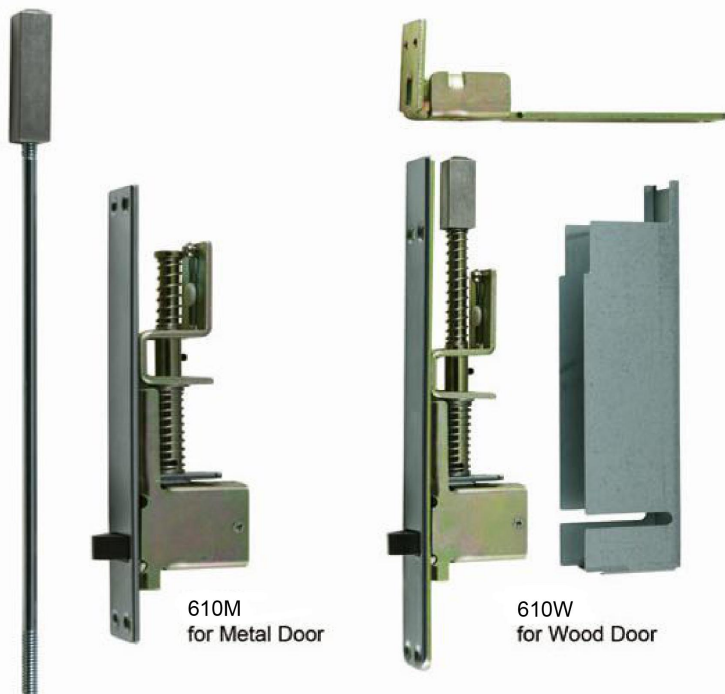

610M
for Metal Door


610W
for Wood Door

Face Plate: 1" x 6-3/4" (25mm x 172mm)
Bolt Head: 1/2" (12.5mm)
Bolt Throw: 3/4" (19mm)
Non-Handed
Finish: US3, US10, US10B, US26, US26D, US32, US32D
Packing: two bolts per set in box
Note: Use in pair, at the top and bottom of inactive door.
For doors of 4' x 8', 4' x 9'.

Luter Fire Command Panic Exit Device

Fire Exit Hardware Selection


PAIR OF DOORS WITH MULLION



2 Rim type
with mullion

Two independent active
doors with full double door
openings when required.
Same direction.


PAIR OF DOORS WITHOUT MULLION



2 Vertical rod type

Surface applied 2 point
locking both doors.
Each door active same
direction.
Do not use with
overlapping astragal.


PAIR OF DOORS WITHOUT MULLION



2 Vertical rod type

Double egress surface
applied.
2 point locking both doors
opposite direction.

PAIR OF DOORS WITHOUT MULLION



1 Vertical rod and
1 Rim type

Both devices are surface
applied. A coordinator
and overlapping stike is
recommended.

SINGLE DOOR



Vertical rod type or
Rim type

Surface applied 2 point
lock. Surface application.

HANDING

