




Panic Hardware

Luter Fire Command Panic Exit Device Surface Mounted Coordinators & Accessories



Luter Fire Command Panic Exit Device

Stop-Applied coordinators

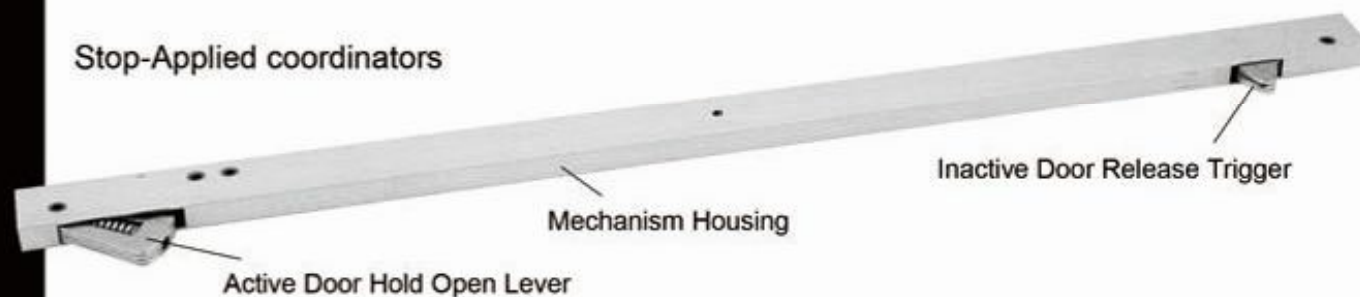


The Coordinator with companion Filler is designed to become an integral part of the door frame and when painted with frame becomes virtually invisible. It is engineered to prevent from damage in case of abnormal force against active door that is held open.


Sizes of coordinators

(E) Length of Housing	(L) for Door Range
32"	34~43"
42"	44~53"
52"	54~96"
60"	97~112"

Filler Bar (F) usually supplied pre-cut from factory. Advise if dimension is other than 5/8".

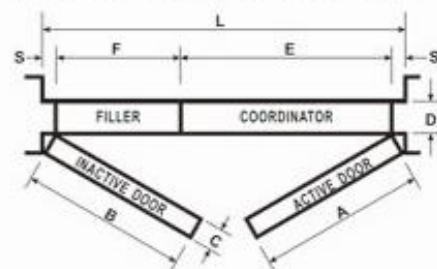

Dorco Coordinator Components


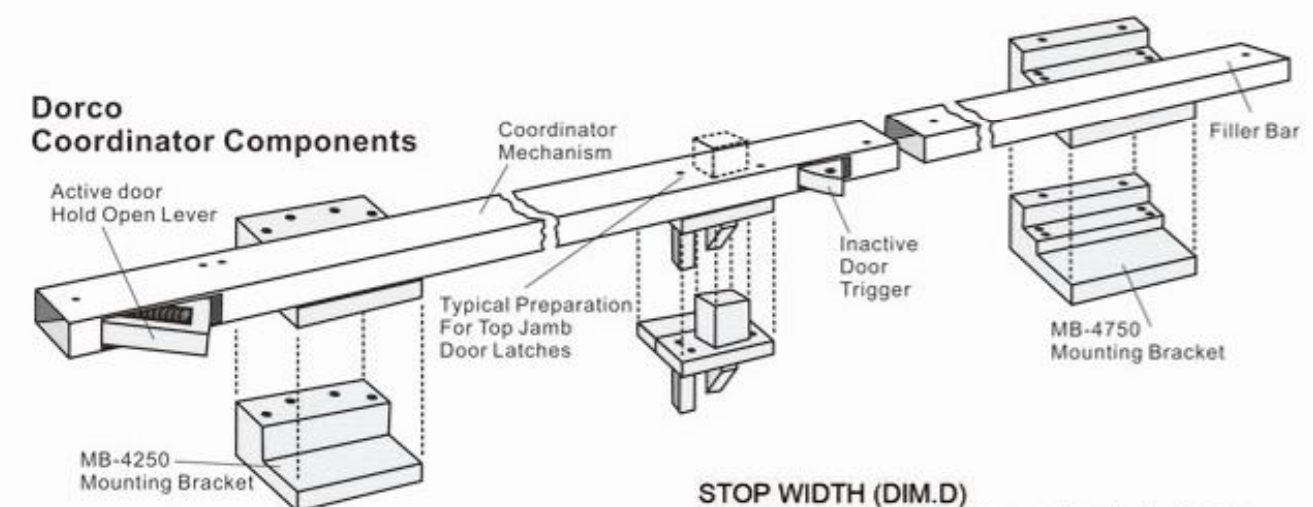


STOP WIDTH (DIM.D)


Minimum stop width (Dim.D) for mounting standard series coordinators is 1-1/4". Coordinators are modified for stop width 1/2" to 1/8".

Mounting Brackets For Stop Applied Hardware

Select one bracket for each hardware item to be stop mounted, such as parallel arm shoes, door holder brackets, stop applied vertical rod strikes, etc.

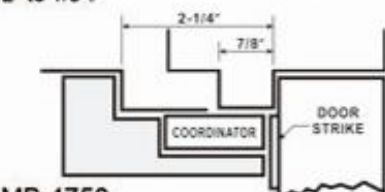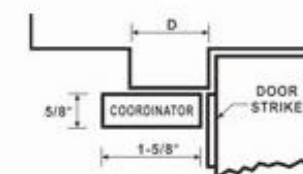

MB-4750
Bracket for stops 7/8" to 2-1/4" wide.

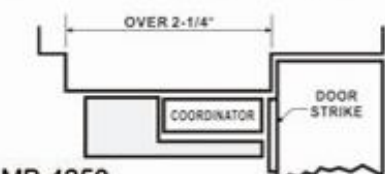

MB-4250
Bracket for stops over 2-1/4" wide.