



DC-690 Cam Action Concealed Door Closer



R27920




Models & Specifications

Model No.	Max. Door Width (mm)	Door Weight (KGS)	Spring Power	Max. Opening Angle
DC-690	1100	25-85	2-4	Double Swing 120°

Note: Standard Back Check

Dimensions (Unit: mm)

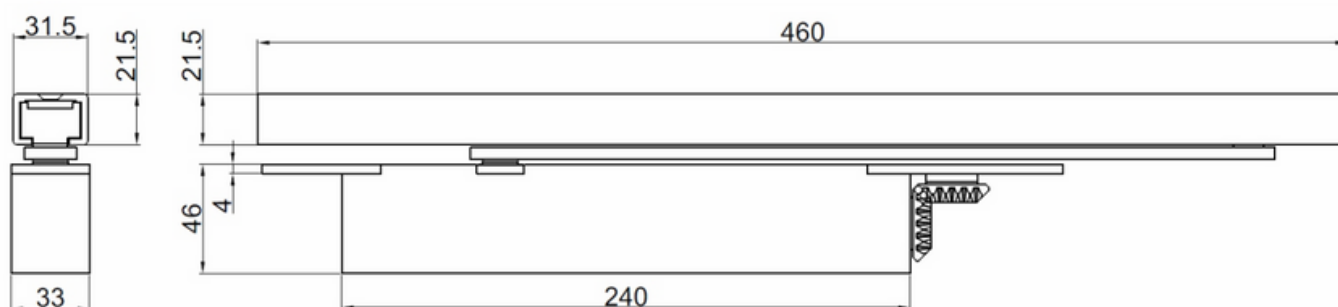

LUTER ENTERPRISE CO., LTD.

Add. : No. 59, Alley 6-6, Lane 298, Beitun Rd., Beitun District, Taichung City 406, Taiwan (R.O.C.)

Tel : +886-4-22479015

Fax : +886-4-22414361



Product iQ will be unavailable on Friday, August 29, from 7:00pm - 12:00am CDT. We apologize for any inconvenience.

UL Product iQ®



Swinging Fire Door Closers

COMPANY

LUTER ENTERPRISE CO LTD

59 Alley 6-6 Lane 298
Beitun Rd
Beitun Dist
Taichung, 406 Taiwan

R27920

Trademark and/or Tradename: **Lutér®**

Note: For additional marking information, refer to the [Guide Information Page](#).

View model for additional information

Model(s): [D018](#), [DC-690](#), [DQ1116](#), [DQ1216](#), [DQ1316](#), [DQ1416](#), [DQ1516](#)

Last Updated on 2025-08-26

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2025 UL LLC."