


Lutér®



DOOR CLOSER

D010 SERIES

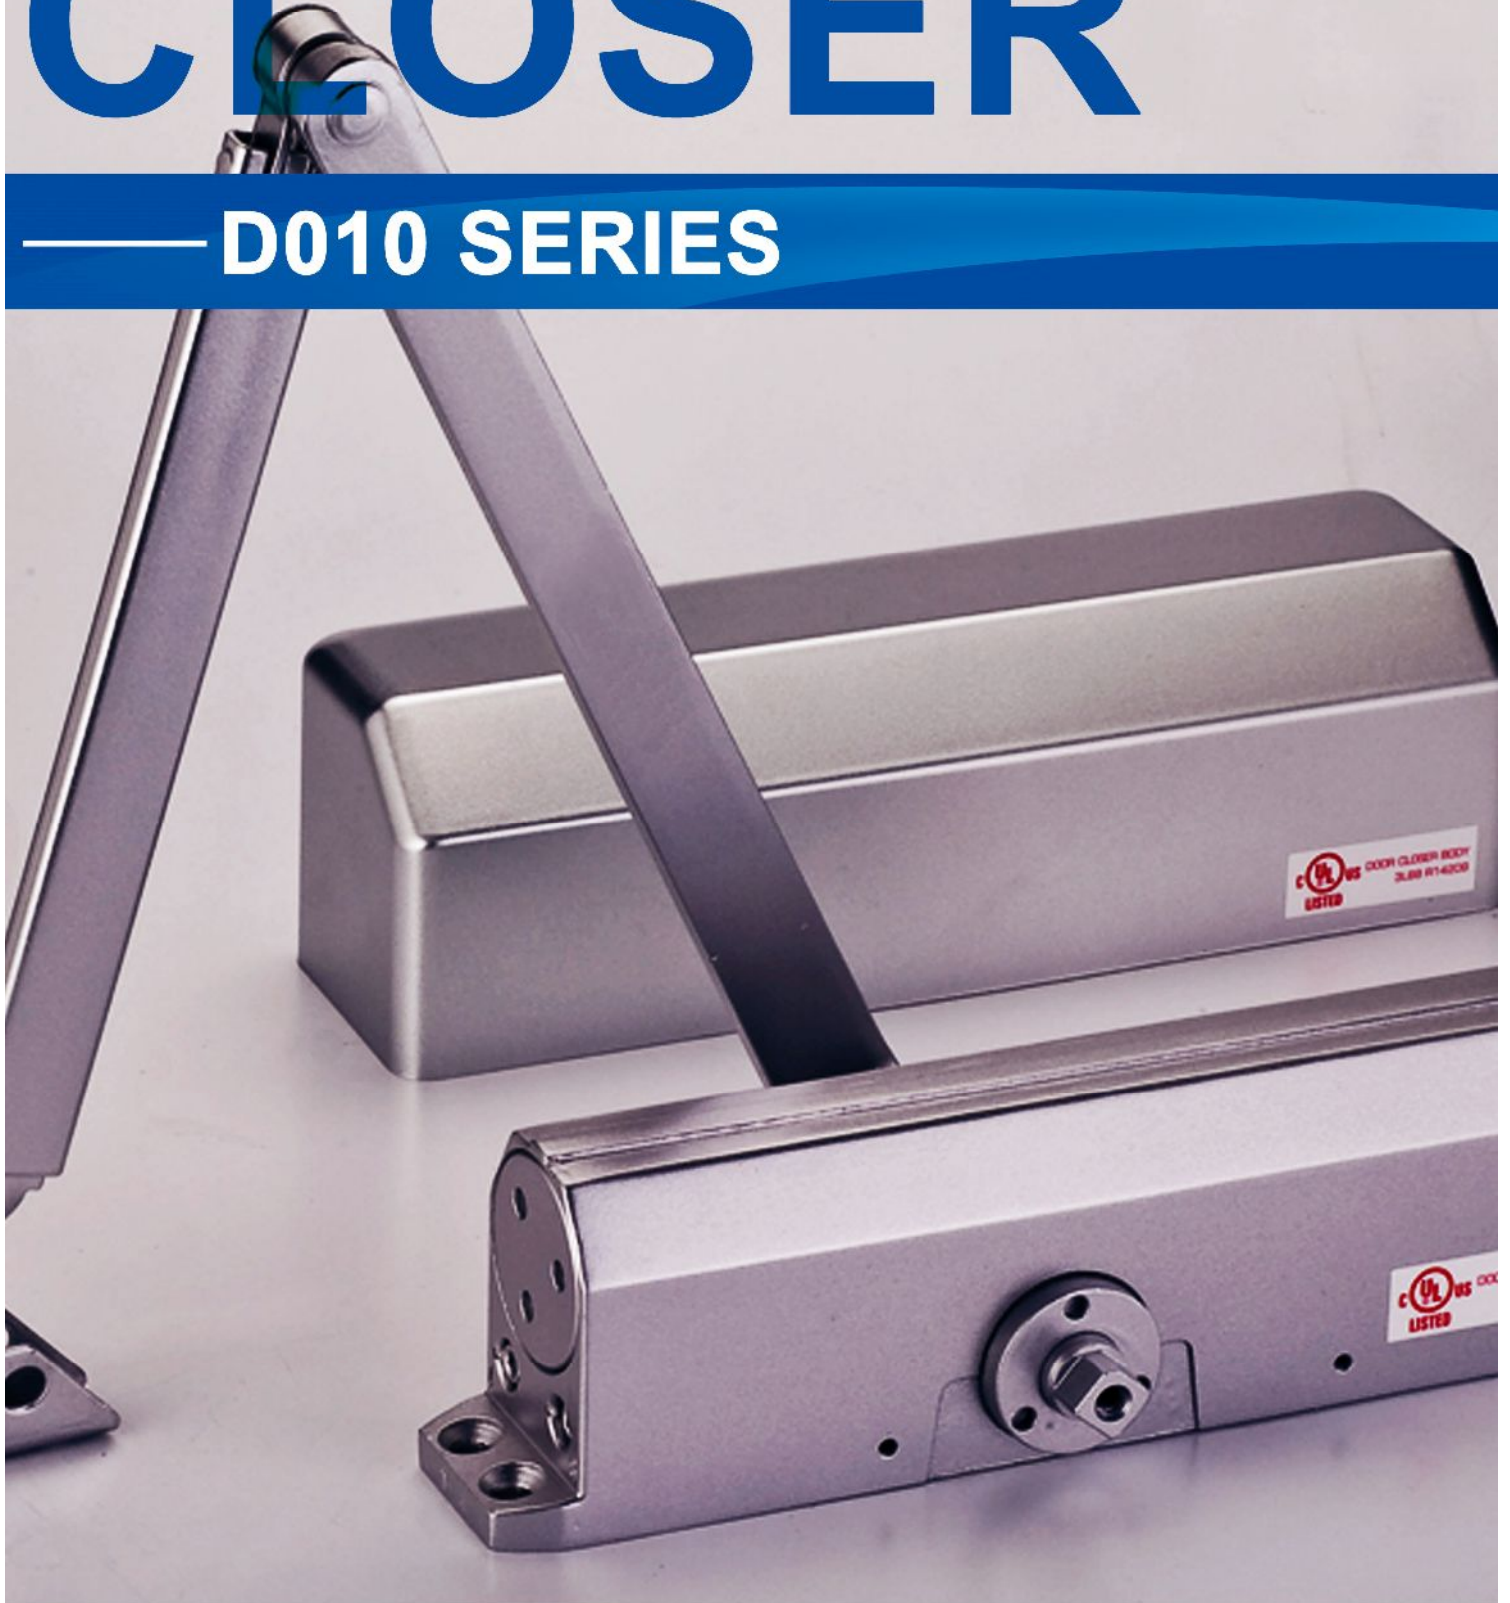

Lutér® Door Closer

Door Closer

CERTIFICATIONS

ANSI/BHMA A156.4-2000 Grade 1 certified.
 Comply with ANSI A117.1 ADA requirements.
 UL/cUL Listed, 3 hours fire rated.
 UL10C, UBC 7-2(1997), UL 228.
 File: R27920



D011 Series



SPECIFICATION

Material	Aluminum alloy body.
Cover	Plastic cover.
Mount Hole Dimension	203mm
Door Handing	Non-Handed.
Valves	Adjustable latching and sweep speed valve. Adjustable Backcheck (BC) valve.
Power Adjustable	Non-sized, #1 ~ #4 or #3 ~ #6.
Opening Angle	All standard arm applications allow doors to swing 180°, conditions permitting.
Arms & Brackets	Standard Tri-pack for regular arm, top jamb and parallel arm application. Additional arms optional.
Arm Function	Standard : Tri-Packed arm, Non-Hold open Optional : Hold open arm; Cust stop arm; Cust stop hold open arm
Drop Plate(Optional)	Standard pull side. Parallel push side.
Fasteners	Self tapping screws and machine screws standard. Sex bolts optional.
Finishes	Aluminum (A), Black (B), Duro (D), Golden (G), Ivory (I), White (W), Silver (S), Bronze (6). Other finishes are available upon request.

D012 Series



SPECIFICATION

Material	Aluminum alloy body. Forged steel arm.
Cover	Full size plastic cover standard, Slim-line plastic cover optional. Metal cover also available.
Mount Hole Dimension	305mm
Door Handing	Non-Handed.
Valves	Adjustable latching and sweep speed valve. Adjustable Backcheck valve Adjustable Delayed action valve optional. (Backcheck and Delayed Action are standard in the same door closer body.)
Power Adjustable	Non-sized, #1 ~ #6.
Opening Angle	All standard arm applications allow doors to swing 180°, conditions permitting.
Arms & Brackets	Standard Tri-pack for regular arm, top jamb and parallel arm application. Additional arms optional.
Arm Function	Standard : Tri-Packed arm, Non-Hold open. Optional : Hold open arm. Cust stop arm. Cust stop hold open arm.
Drop Plate(Optional)	Standard pull side. Parallel push side. Top jamb push side.
Fasteners	Self tapping screws and machine screws standard. Sex bolts optional.
Finishes	Aluminum (A), Black (B), Duro (D), Golden (G), Ivory (I), White (W), Silver (S), Bronze (6). Other finishes are available upon request.

Lutér® Door Closer

D013 Series



SPECIFICATION

Material	Aluminum alloy body. Forged steel arm.
Cover	Full size plastic cover standard. Metal cover also available.
Mount Hole Dimension	283mm
Door Handing	Non-Handed.
Valves	Adjustable latching and sweep speed valve. Adjustable Backcheck valve. Adjustable Delayed action valve optional.
Power Adjustable	Non-sized, #1 ~ #6.
Opening Angle	All standard arm applications allow doors to swing 180°, conditions permitting.
Arms & Brackets	Standard Tri-pack for regular arm, top jamb and parallel arm application. Additional arms optional.
Arm Function	Standard : Tri-Packed arm, Non-Hold open Optional : Hold open arm; Cust stop arm; Cust stop hold open arm
Drop Plate(Optional)	Standard pull side. Parallel push side.
Fasteners	Self tapping screws and machine screws standard. Sex bolts optional.
Finishes	Aluminum (A), Black (B), Duro (D), Golden (G), Ivory (I), White (W), Silver (S), Bronze (6). Other finishes are available upon request.

D014 Series



SPECIFICATION

Material	Cast Iron body, forged steel arm.
Cover	Full size plastic cover standard. Metal cover also available.
Door Handing	Non-Handed.
Valves	Adjustable latching and sweep speed valve. Adjustable Backcheck valve. Delayed action valve optional.
Power Adjustable	Non-sized, #1 ~ #6.
Opening Angle	All standard arm applications allow doors to swing 180°, conditions permitting.
Arms & Brackets	Standard Tri-pack for regular arm, top jamb and parallel arm application. Additional arms optional.
Arm Function	Standard : Tri-Packed arm, Non-Hold open Optional : Hold open arm; Cust stop arm; Cust stop hold open arm
Drop Plate(Optional)	Standard pull side; Parallel push side; Top jamb side; Top jamb centre push side.
Fasteners	Self tapping screws, machine screws and sex bolts standard packing.
Finishes	Aluminum (A), Black (B), Duro (D), Golden (G), Ivory (I), White (W), Silver (S), Bronze (6). Other finishes are available upon request.

D015 Series



SPECIFICATION

Material	Aluminum alloy body.
Cover	Plastic cover(only for commercial model).
Mount Hole Dimension	Commercial : 203mm Economy model : 209mm
Door Handing	Non-Handed.
Valves	Adjustable latching and sweep speed valve. Adjustable Backcheck (BC) valve or non Backcheck.
Power Adjustable	Non-sized, #1 ~ #4 or #3 ~ #6. Fixed size 3, 4, 5 also available.(Economy model)
Opening Angle	All standard arm applications allow doors to swing 180°, conditions permitting.
Arms & Brackets	Standard Tri-pack for regular arm, top jamb and parallel arm application. Additional arms optional.
Arm Function	Standard : Tri-Packed arm, Non-Hold open Optional : Hold open arm; Cust stop arm.
Drop Plate(Optional)	Standard pull side. Parallel push side.
Fasteners	Self tapping screws and machine screws standard. Sex bolts optional.
Finishes	Aluminum (A), Black (B), Duro (D), Golden (G), Ivory (I), White (W), Silver (S), Bronze (6). Other finishes are available upon request.

Lutér®

Luter Enterprise Co.,Ltd.

No.59, Alley 6-6, Lane298, Beitun Rd., Beitun
District, Taichung City 406, Taiwan (R.O.C.)

TEL : +886-4-22479015

FAX : +886-4-22414361

www.luter.com.tw

e-mail : louischou@luter.com.tw