
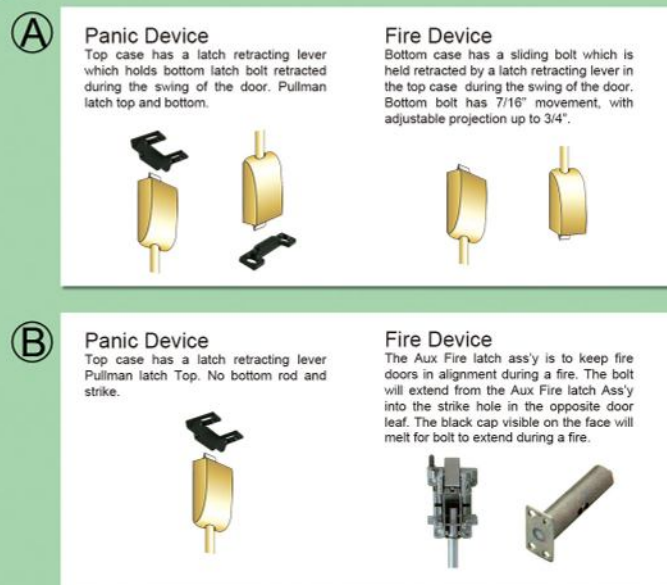


Luter Fire Command Panic Exit Device

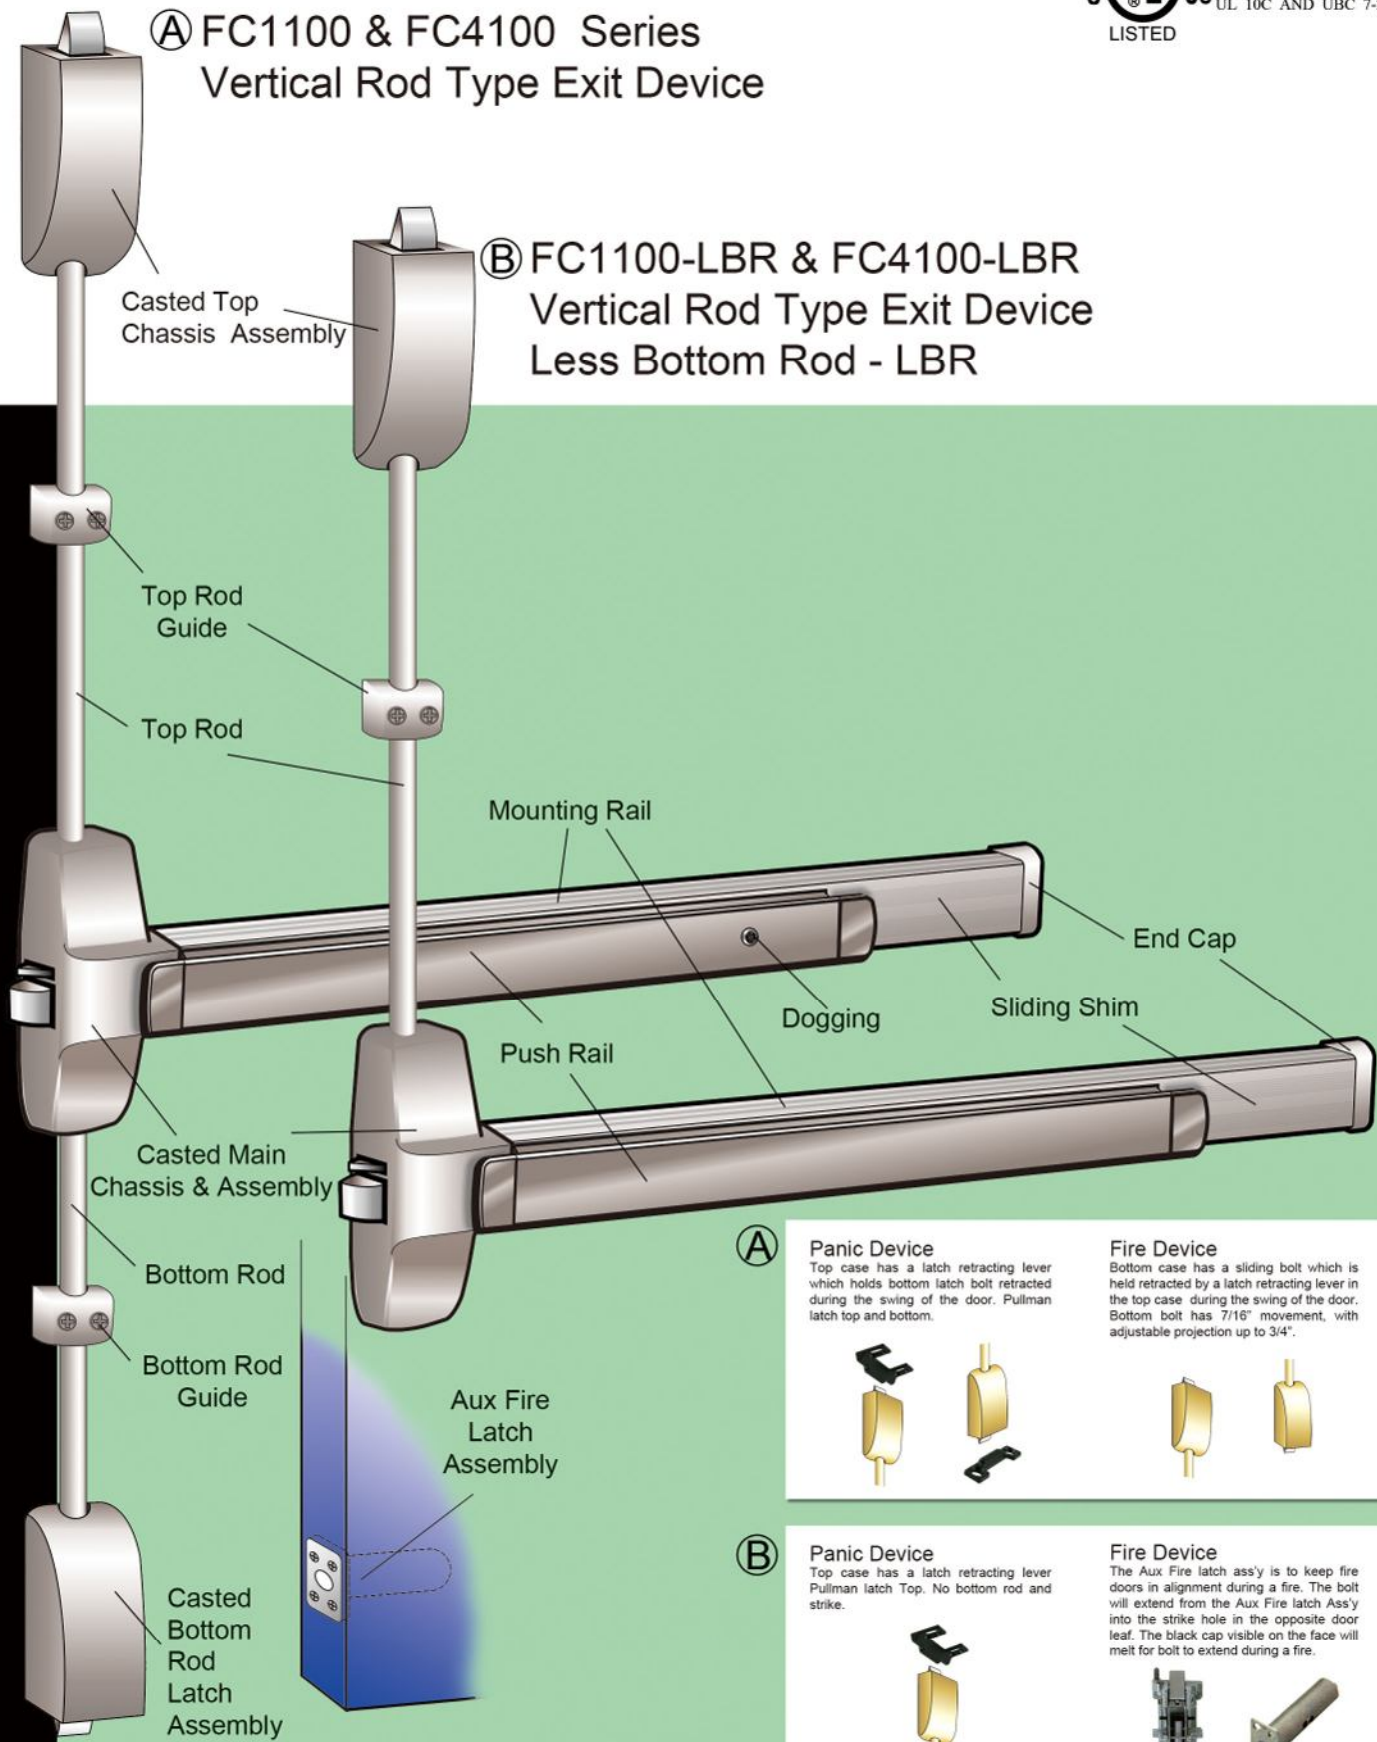


**Specifications**

Conforms to Ansi STD A156.3 Grade 1

LBR -----	(B) No Bottom Strike. Free access for wheel chairs, stretcher and carts from tripping and damaging of floors while dragging on bottom bolts.
For Doors -----	1 3/4" thick standard optional 2 1/4" thick. 3 3/4" minimum stile width required for single door application, 3 1/2" minimum stile for double door application using standard strike and pull or lever trims.
Classis -----	Non-ferrous alloy (Panic Grade), steel (Fire Grade).
Cover -----	Zinc Cover stock hollow metal doors with 161 cut out.
Mounting -----	Furnished with wood and machine screws. Available with thru bolts on request. Thru bolts are included and standard packaging on rated devices.
End Cap -----	Zinc construction.
Hand -----	Non handed, center hub.
Latch Bolt -----	Stainless steel 3/4" throw with anti-pick feature.
Spring -----	Stainless steel throughout.
ANSI standard -----	A156.3, Grade 1.
Rail Assembly -----	Heavy gauge extruded aluminum body with stainless steel push pad.
Strike -----	Packed standard (see strike page).
Dogging Feature -----	Allen-type key furnished standard on non-fire labeled devices.
UL and ULC Listed ---	9960 Series for panic. F9960 Series for fire exit hardware for all types of 4' x 8' single doors and 8' x 8' double doors for up to 3 hours fire labeled installations, conforms to standards UL10C and UBC 7-2-1997 codes.
Finish -----	Architectural plated finishes.
Door size -----	9960V3694 and F9960V3684 for 36" x 84" doors. 9990V4896 and F9990V4896 for 48" x 96" doors. 9990V3696 and F9990V3696 for 36" x 96" doors. 9950V36120 for 36" x 120" doors. 9940V48120 for 48" x 120" doors.

**Minimum Stile Requirement**

DOUBLE DOOR with Two Vertical Rod Type Exit Device

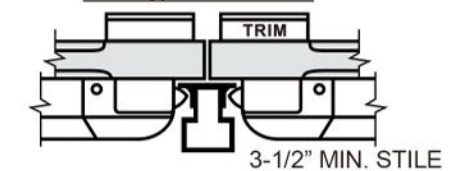

**Dimensions**

Touchbar height to finished floor	41" (1043mm) at center
Touchbar projection neutral	3-5/8" (92mm)
depressed	1-7/8" (73mm)
Center case	8-1/16" x 2-3/4" x 2-1/2" (205mm x 68mm x 62mm)
Device length	
Short 3" (914mm)	2'2" to 3' (840mm to 914mm) door size
Long 4" (1219mm)	2'9" to 4' (1145mm to 1219mm) door size
Panic grade top & bottom latch case	3-15/16" x 2-1/8" x 1-3/8" (100mm x 52mm x 42mm)
Fire grade top latch case	3-15/16" x 2-11/16" x 2-1/16" (100mm x 68mm x 53mm)
Fire grade bottom latch case	(A) 3-15/16" x 2-1/8" x 1-3/8" (100mm x 52mm x 42mm)
Top & bottom rod length for 36" x 84" doors	Top rod 43-1/4" (1100mm), bottom rod 37-3/4" (960mm)
Top & bottom rod length for 48" x 96" doors	Top rod 53-1/16" (1350mm), bottom rod 37-3/4" (960mm)
Vertical rods	1/2" (13mm) Round tubing.