


Luter FC2200 Series Mortise Exit Device

Available stock length

- For 32" doors, Device can be cut to fit doors to 24" wide
- For 36" doors, Device can be cut to fit doors to 32" wide
- For 48" doors, Device can be cut to fit doors to 44" wide

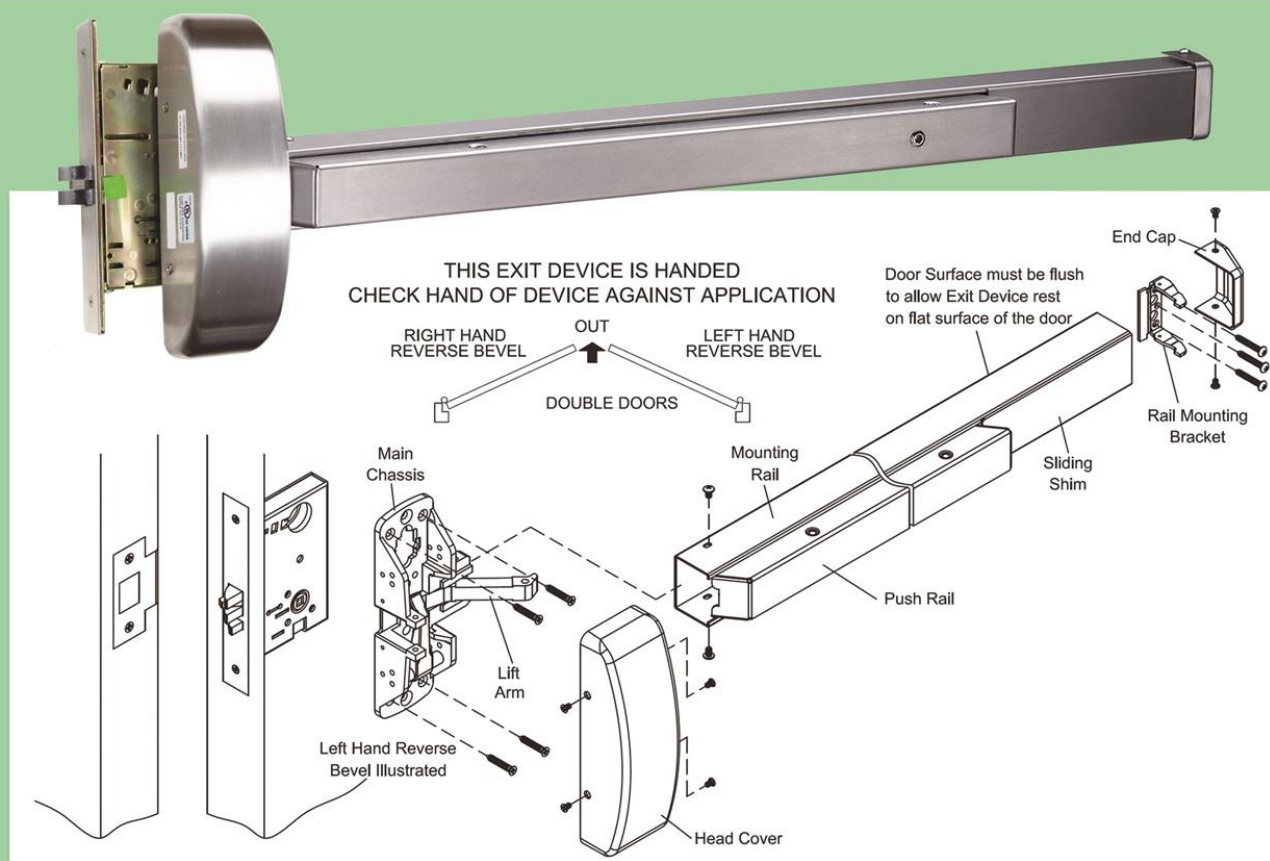

	MRESC-00	MRESC-30	MRESC-40	MRESC-05
<p>Exit Device Chassis</p> <p>Concealed V/R Chassis</p>	<p>Key locked and Unlock mortise lock Lever operate To open</p>	<p>No Cyl, Trim Always Operable</p>	<p>Pull when Push bar locked down Dummy Esc Lever Trim</p>	<p>Rigid Lever, Cyl Esc Lever Trim</p>
	00 function Entrance	30 function Passage	40 function Dummy	05 function Storeroom
	Attach the collar and mortise cyl to the esc case with mortise nut, attach case to door thru-bolting (2) screws to the chassis, aligning spindle to hub	Attach Esc case to door thru-bolting the (2) screws to the chassis, aligning spindle to hub of the Chassis	Attach the collar and dummy cyl to the esc case with mortise nut, attach case to door thru-bolting (2) screws to the chassis, aligning spindle to hub	Attach the collar and mortise cyl to the esc case with mortise nut, attach case to door thru-bolting (2) screws to the chassis, aligning spindle to hub